


Eur päisches Patentamt  
Eur pean Patent Office  
Office européen des brevets



(11) EP 0 999 341 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
10.05.2000 Bulletin 2000/19

(51) Int Cl.7: E21B 33/124, E21B 43/14

(21) Application number: 99308552.1

(22) Date of filing: 28.10.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Kilgore, Marion D.  
Dallas, Texas 75287 (US)

(74) Representative: Wain, Christopher Paul et al  
A.A. Thornton & Co.  
235 High Holborn  
London WC1V 7LE (GB)

(30) Priority: 02.11.1998 US 184770

(71) Applicant: Halliburton Energy Services, Inc.  
Dallas, Texas 75381-9052 (US)

### (54) Method and apparatus for controlling fluid flow in subterranean formations

(57) Apparatus and methods for controlling fluid flow within a subterranean well. A longitudinally spaced apart series of selectively set and unset inflatable packers (30,32,34) is utilized to substantially isolate desired portions (20,22,24,26) of a formation (14) intersected by a

well (12). Setting and unsetting of the packers (30,32,34) may be accomplished by a variety of devices, some of which may be remotely controllable. Additionally, a series of fluid control devices (36,38,40) may be alternated with the packers (30,32,34) as part of a tubular string (28) positioned within the well (12).

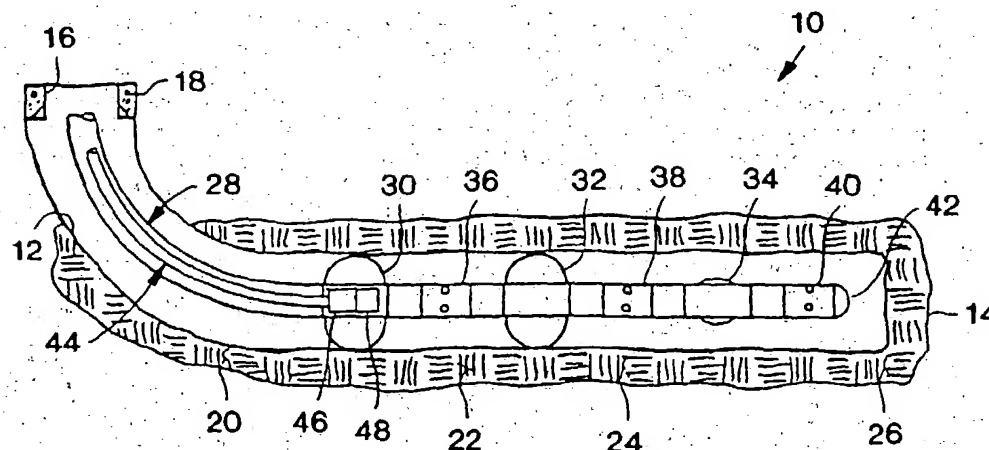


FIG. 2

EP 0 999 341 A2

**Description**

[0001] The present invention relates generally to operations performed within subterranean wells, and more relates to particularly provides apparatus and methods for controlling fluid flow within a subterranean well. More specifically, the invention relates to selectively set and unset packers.

[0002] In horizontal well open hole completions, fluid migration has typically been controlled by positioning a production tubing string within the horizontal wellbore intersecting a formation. An annulus formed between the wellbore and the tubing string is then packed with gravel. A longitudinally spaced apart series of sliding sleeve valves in the tubing string provides fluid communication with selected portions of the formation in relatively close proximity to an open valve, while somewhat restricting fluid communication with portions of the formation at greater distances from an open valve. In this manner, water and gas coning may be reduced in some portions of the formation by closing selected ones of the valves, while not affecting production from other portions of the formation.

[0003] Unfortunately, the above method has proved unsatisfactory, inconvenient and inefficient for a variety of reasons. First, the gravel pack in the annulus does not provide sufficient fluid restriction to significantly prevent fluid migration longitudinally through the wellbore. Thus, an open valve in the tubing string may produce a significant volume of fluid from a portion of the formation longitudinally remote from the valve. However, providing additional fluid restriction in the gravel pack in order to prevent fluid migration longitudinally therethrough would also deleteriously affect production of fluid from a portion of the formation opposite an open valve.

[0004] Second, it is difficult to achieve a uniform gravel pack in horizontal well completions. In many cases the gravel pack will be less dense and/or contain voids in the upper portion of the annulus. This situation results in a substantially unrestricted longitudinal flow path for migration of fluids in the wellbore.

[0005] Third, in those methods which utilize the spaced apart series of sliding sleeve valves, intervention into the well is typically required to open or close selected ones of the valves. Such intervention usually requires commissioning a slickline rig, wireline rig, coiled tubing rig, or other equipment, and is very time-consuming and expensive to perform. Furthermore, well conditions may prevent or hinder these operations.

[0006] Therefore, it would be advantageous to provide a method of controlling fluid flow within a subterranean well, which method does not rely on a gravel pack for restricting fluid flow longitudinally through the wellbore. Additionally, it would be advantageous to provide associated apparatus which permits an operator to produce or inject fluid from or into a selected portion of a formation intersected by the well. These methods and apparatus would be useful in open hole, as well as

cased hole, completions.

[0007] It would also be advantageous to provide a method of controlling fluid flow within a well, which does not require intervention into the well for its performance. Such method would permit remote control of the operation, without the need to kill the well or pass equipment through the wellbore.

[0008] In carrying out the principles of the present invention, in accordance with an embodiment thereof, a method is provided which utilizes selectively set and unset packers to control fluid flow within a subterranean well. The packers may be set or unset with a variety of power sources which may be installed along with the packers, provided at a remote location, or conveyed into the well when it is desired to set or unset selected ones of the packers. Associated apparatus is provided as well.

[0009] In broad terms, a method of controlling fluid flow within a subterranean well is provided which includes the step of providing a tubing string including a longitudinally spaced apart series of wellbore sealing devices. The sealing devices are selectively engaged with the wellbore to thereby restrict fluid flow between the tubing string and a corresponding selected portion of a formation intersected by the wellbore.

[0010] In one aspect of the present invention, the sealing devices are inflatable packers. The packers may be alternately inflated and deflated to prevent and permit, respectively, fluid flow longitudinally through the wellbore.

[0011] In another aspect of the present invention, flow control devices are alternated with the sealing devices along the tubing string to provide selective fluid communication between the tubing string and portions of the formation in relatively close proximity to the flow control devices. Thus, an open flow control device positioned between two sealing devices engaged with the wellbore provides unrestricted fluid communication between the tubing string and the portion of the formation longitudinally between the two sealing devices, but fluid flow from other portions of the formation is substantially restricted.

[0012] In yet another aspect of the present invention, the sealing devices and/or flow control devices may be actuated by intervening into the well, or by remote control. If intervention is desired, a fluid source, battery pack, shifting tool, pump, or other equipment may be conveyed into the well by slickline, wireline, coiled tubing, or other conveyance, and utilized to selectively adjust the flow control devices and selectively set or unset the sealing devices. If remote control is desired, the flow control devices and/or sealing devices may be actuated via a form of telemetry, such as mud pulse telemetry, radio waves, other electromagnetic waves, acoustic telemetry, etc. Additionally, the flow control devices and/or sealing devices may be actuated via hydraulic, electric and/or data transmission lines extending to a remote location, such as the earth's surface or another location within the well.

[0013] According to another aspect of the invention there is provided a method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within a portion of the wellbore intersecting a formation, the tubular string including a longitudinally spaced apart series of wellbore sealing devices; and actuating a selected at least one of the sealing devices to thereby selectively restrict fluid flow through the wellbore between first and second portions of the formation.

[0014] In an embodiment, the method further comprises the steps of conveying a power source into the tubular string and connecting the power source to the selected one of the sealing devices. The actuating step may further comprise flowing fluid from the power source to the selected one of the sealing devices.

[0015] In an embodiment, the method further comprises the steps of conveying a pump into the tubular string and connecting the pump to the selected at least one of the sealing devices.

[0016] In an embodiment, the tubular string further includes a pump, the pump being selectively connectable to each of the sealing devices for delivery of fluid thereto. The tubular string may further include a receiver, and a control module, the receiver being operative to receive a signal transmitted from a remote location and direct the control module to connect the pump to the selected at least one of the sealing devices in response to the signal.

[0017] In an embodiment, the tubular string further includes a longitudinally spaced apart series of actuators, each of the actuators being connected to one of the sealing devices, and each of the actuators being operative to actuate one of the sealing devices in response to a signal transmitted thereto from a remote location.

[0018] In an embodiment, the tubular string further includes an actuator, the actuator being connected to each of the sealing devices via a control module.

[0019] In an embodiment, the tubular string further includes a longitudinally spaced apart series of control modules, each of the control modules being connected to one of the sealing devices, and each of the control modules being connected via lines to a remote location.

[0020] According to another aspect of the invention there is provided a method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore opposite a formation intersected by the wellbore, so that each of the sealing devices is positioned between adjacent ones of a corresponding series of portions of the formation, the tubular string including a longitudinally spaced apart series of sealing devices; conveying a power source into the tubular string, the power source being configured to actuate selected ones of the sealing devices; and actuating at least one of the sealing devices to thereby prevent fluid flow longitudinally through the wellbore external to the tubular string.

[0021] In an embodiment, the sealing devices are in-

flatable packers.

[0022] In an embodiment, in the conveying step, the power source comprises a fluid conduit attached to a fluid coupling

5 [0023] In an embodiment, in the conveying step, the fluid conduit is coiled tubing, and the conveying step further comprises engaging the fluid coupling with the at least one sealing device, thereby permitting fluid communication between the at least one sealing device and the coiled tubing.

[0024] In an embodiment, the tubular string further includes a longitudinally spaced apart series of flow control devices, the flow control devices being alternated with the sealing devices

15 [0025] In an embodiment, the actuating step further comprises actuating a corresponding one of the flow control devices adjacent the at least one of the sealing devices, thereby restricting fluid communication between the wellbore external to the tubular string and the interior of the tubular string

20 [0026] According to another aspect of the invention there is provided a method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices; conveying a pump into the tubular string; engaging the pump with a selected at least one of the sealing devices; and actuating the pump, thereby sealingly engaging the at least one of the sealing devices with the wellbore.

25 [0027] In an embodiment, the conveying step further comprises conveying a latching device into the tubular string. The engaging step may further comprise latching the latching device within the at least one of the sealing devices.

30 [0028] In an embodiment, the method further comprises the step of utilizing the latching device to actuate a selected at least one of a series of flow control devices in the tubular string.

35 [0029] In an embodiment, the conveying step further comprises conveying a power source into the tubular string with the pump, the power source being adapted to supply power to actuate the pump. In the conveying step, the power source may be a battery.

40 [0030] According to another aspect of the invention there is provided a method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices and a pump; conveying a power source into the tubular string; engaging the power source with the pump; and actuating the pump to thereby sealingly engage a selected at least one of the sealing devices with the wellbore.

45 [0031] In an embodiment, the tubular string further includes a control module interconnecting the pump to each of the sealing devices.

[0032] In an embodiment, the actuating step further

comprises operating the control module, thereby providing fluid communication between the pump and the at least one of the sealing devices.

[0033] In an embodiment, the engaging step further comprises engaging the power source with the control module.

[0034] In an embodiment, the tubular string further includes a longitudinally spaced apart series of flow control devices alternating with the sealing devices.

[0035] In an embodiment, the actuating step further comprises operating the control module, thereby providing fluid communication between the pump and a selected at least one of the flow control devices.

[0036] According to another aspect of the invention there is provided a method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices, a pump, a control module interconnecting the pump to the sealing devices, and a receiver connected to the pump and control module; transmitting a first signal to the receiver, thereby directing the control module to provide fluid communication between the pump and a selected at least one of the sealing devices; transmitting a second signal to the receiver, thereby actuating the pump; and sealingly engaging the at least one of the sealing devices with the wellbore.

[0037] In an embodiment, the tubular string further includes a power source connected to the receiver. The power source may be a battery.

[0038] In an embodiment, the first signal transmitting step is performed via telemetry from a remote location.

[0039] In an embodiment, in the first signal transmitting step, the first signal is transmitted via one or more lines connecting a remote location to the receiver.

[0040] In an embodiment, the tubular string further includes a longitudinally spaced apart series of flow control devices, and further comprising the step of transmitting a third signal to the receiver, thereby directing the control module to provide fluid communication between the pump and a selected at least one of the flow control devices.

[0041] According to another aspect of the invention there is provided a method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices and a longitudinally spaced apart series of actuators, each of the actuators being operative to actuate one of the sealing devices; and transmitting a first signal to a selected at least one of the actuators, thereby actuating a corresponding selected at least one of the sealing devices to sealingly engage the wellbore.

[0042] In an embodiment, each of the actuators includes a pump in selectable fluid communication with one of the sealing devices. Each of the actuators may

further include a receiver adapted to operatively receive the first signal. Each of the actuators may further include a power source connected to the pump.

[0043] In an embodiment, the tubular string further includes a longitudinally spaced apart series of flow control devices, the flow control devices being alternated with the sealing devices. The method may further comprise the step of transmitting a second signal to the selected at least one of the actuators, thereby actuating a corresponding selected at least one of the flow control devices to restrict fluid flow between the wellbore external to the tubular string and the interior of the tubular string.

[0044] According to another aspect of the invention there is provided a method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices and an actuator in selectable fluid communication with each sealing device; selecting at least one of the sealing devices for actuation; and transmitting a first signal to the actuator, thereby actuating the selected at least one of the sealing devices to sealingly engage the wellbore.

[0045] In an embodiment, the selecting step is performed by transmitting a second signal to a control module of the actuator.

[0046] In an embodiment, the transmitting step further comprises transmitting the first signal from a remote location to a receiver of the actuator.

[0047] In an embodiment, the actuator includes a power source and a pump, and the transmitting step further comprises actuating the selected at least one of the sealing devices by pumping fluid to the selected at least one of the sealing devices.

[0048] In an embodiment, the actuator includes an impeller operatively connected to a pump, and the transmitting step further comprises flowing fluid over the impeller, thereby causing the pump to deliver fluid to the selected at least one of the sealing devices.

[0049] In an embodiment, the actuator further includes a control module, and the method further comprises the step of transmitting a second signal to the actuator, thereby causing the control module to provide fluid communication between the pump and the selected at least one of the sealing devices.

[0050] According to another aspect of the invention there is provided a method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices and a first longitudinally spaced apart series of control modules, each of the first control modules being connected to one of the sealing devices; interconnecting lines between each of the first control modules; extending the lines to a location remote from the control modules; and transmitting a first signal to a selected at least one of the first control modules,

thereby actuating a corresponding selected at least one of the sealing devices to sealingly engage the wellbore.

[0051] The lines may be interconnected between the modules before the tubular string is positioned within the wellbore.

[0052] In an embodiment, the transmitting step is performed by transmitting the first signal via the lines from the remote location.

[0053] In an embodiment, the interconnecting step further comprises supplying fluid pressure via the lines to each of the first control modules.

[0054] In an embodiment, the transmitting step further comprises admitting the fluid pressure to the selected at least one of the sealing devices.

[0055] In an embodiment, the tubular string further includes a longitudinally spaced apart series of flow control devices and a second longitudinally spaced apart series of control modules, the flow control devices alternating with the sealing devices, and each of the second control modules being connected to one of the flow control devices. The method may further comprise the step of transmitting a second signal to a selected one of the second control modules, thereby actuating a corresponding selected one of the flow control devices to restrict fluid flow therethrough.

[0056] According to another aspect of the invention there is provided apparatus for controlling fluid flow within a subterranean wellbore, the apparatus comprising: a plurality of wellbore sealing devices interconnected in a tubular string; and a power source configured for actuating selected ones of the sealing devices to sealingly engage the wellbore.

[0057] In an embodiment, the power source is longitudinally reciprocally disposed within the tubular string.

[0058] In an embodiment, the power source may include a fluid conduit couplable with selected ones of the sealing devices for fluid delivery thereto.

[0059] In an embodiment, the power source includes a fluid pump couplable with selected ones of the sealing devices.

[0060] In an embodiment, the power source includes an actuator connected to each of the sealing devices via a control module.

[0061] In an embodiment, the power source includes a plurality of actuators, each of the actuators being connected to one of the sealing devices.

[0062] In an embodiment, the power source includes a plurality of control modules, each of the control modules being connected to one of the sealing devices.

[0063] According to another aspect of the invention there is provided apparatus for controlling fluid flow within a subterranean well, the apparatus comprising: a series of longitudinally spaced apart sealing devices; a series of longitudinally spaced apart flow control devices, the flow control devices and sealing devices being interconnected in a tubular string in which the flow control devices are alternated with the sealing devices; and a power source adapted for actuating the sealing devices

and flow control devices.

[0064] In an embodiment, the power source includes first and second series of control modules interconnected in the tubular string, each of the first control modules being connected to one of the sealing devices, and each of the second control modules being connected to one of the flow control devices.

[0065] In an embodiment, each of the first and second control modules is remotely operable.

[0066] In an embodiment, each of the first and second modules is connected to a remote location via lines extending between the remote location and the first and second control modules.

[0067] In an embodiment, the power source includes an actuator interconnected to each of the sealing devices and to each of the flow control devices.

[0068] In an embodiment, the power source includes a series of actuators, each of the actuators being interconnected to one of the sealing devices and to one of the flow control devices.

[0069] According to another aspect of the invention there is provided apparatus for controlling fluid flow within a subterranean well, the apparatus comprising: an actuator including a gas chamber, a fluid passage connected to the chamber, an impeller disposed within the fluid passage, a pump connected to the impeller, and a valve connected to the fluid passage, the valve selectively permitting and preventing fluid flow through the fluid passage; and at least one wellbore sealing device connected to the actuator.

[0070] In an embodiment, the actuator further includes a receiver connected to the valve, the receiver directing the valve to permit fluid flow through the fluid passage in response to a first signal received by the receiver.

[0071] In an embodiment, the actuator further includes a control module connected to the receiver, the receiver directing the control module to connect the pump to a selected one of a plurality of the at least one sealing devices in response to a second signal received by the receiver.

[0072] In an embodiment, the apparatus further comprises a plurality of flow control devices, the receiver directing the control module to connect the pump to a selected one of the flow control devices in response to a third signal received by the receiver.

[0073] In an embodiment, the actuator further includes a power source connected to the receiver. The power source may be a battery.

[0074] Reference is now made to the accompanying drawings, in which:

FIG. 1 is a schematicized cross-sectional view of a subterranean well;

FIG. 2 is a schematicized partially cross-sectional and partially elevational view of the well of FIG. 1, in which steps of a first embodiment of a method according to the present invention have been per-

formed;

FIG. 3 is a schematicized partially cross-sectional and partially elevational view of the well of FIG. 1, in which steps of a second embodiment of a method according to the present invention have been performed;

FIG. 4 is a schematicized partially cross-sectional and partially elevational view of the well of FIG. 1, in which steps of a third embodiment of a method according to the present invention have been performed;

FIG. 5 is a schematicized partially cross-sectional and partially elevational view of the well of FIG. 1, in which steps of a fourth embodiment of a method according to the present invention have been performed;

FIG. 6 is a schematicized partially cross-sectional and partially elevational view of the well of FIG. 1, in which steps of a fifth embodiment of a method according to the present invention have been performed;

FIG. 7 is a schematicized partially cross-sectional and partially elevational view of the well of FIG. 1, in which steps of a sixth embodiment of a method according to the present invention have been performed;

FIG. 8 is a schematicized partially cross-sectional and partially elevational view of the well of FIG. 1, in which steps of a seventh embodiment of a method according to the present invention have been performed;

FIG. 9 is a schematicized cross-sectional view of a first embodiment of an apparatus according to the present invention;

FIG. 10 is a schematicized quarter-sectional view of a first embodiment of a release device according to the invention which may be used with the first apparatus;

FIG. 11 is a schematicized quarter-sectional view of a second embodiment of a release device according to the present invention which may be used with the first apparatus;

FIG. 12 is a schematicized quarter-sectional view of a second embodiment of an apparatus according to the present invention;

FIG. 13 is a schematicized quarter-sectional view of a third embodiment of an apparatus according to the present invention;

FIG. 14 is a schematicized quarter-sectional view of a fourth embodiment of an apparatus according to the present invention;

FIG. 15 is a cross-sectional view of an embodiment of an atmospheric chamber according to the present invention;

FIG. 16 is a schematicized view of a fifth embodiment of an apparatus according to the present invention;

FIG. 17 is a schematicized view of a sixth embodi-

ment of an apparatus according to the present invention;

FIG. 18 is a schematicized elevational view of a seventh embodiment of an apparatus according to the present invention; and

FIG. 19 is a schematicized elevational view of an eighth embodiment of an apparatus according to the present invention.

[0075] Representatively and schematically illustrated in FIG. 1 is a method 10 which embodies principles of the present invention. In the following description of the method 10 and other apparatus and methods described herein, directional terms, such as "above", "below", "upper", "lower", etc. are used for convenience in referring to the accompanying drawings. Additionally, it is to be understood that the various embodiments of the present invention described herein may be utilized in various orientations, such as inclined, inverted, horizontal, vertical, etc., without departing from the principles of the present invention.

[0076] The method 10 is described herein as it is practiced in an open hole completion of a generally horizontal wellbore portion 12 intersecting a formation 14. However, it is to be clearly understood that methods and apparatus embodying principles of the present invention may be utilized in other environments, such as vertical wellbore portions, cased wellbore portions, etc. Additionally, the method 10 may be performed in wells including both cased and uncased portions, and vertical, inclined and horizontal portions; for example, including the generally vertical portion of the well lined with casing 16 and cement 18. Furthermore, the method 10 is described in terms of producing fluid from the well, but the method may also be utilized in injection operations. As used herein, the term "wellbore" is used to indicate an uncased wellbore (such as wellbore 12 shown in FIG. 1), or the interior bore of the casing or liner (such as the casing 16) if the wellbore has casing or liner installed therein.

[0077] It will be readily appreciated by a person of ordinary skill in the art that if the well shown in FIG. 1 is completed in a conventional manner utilizing gravel surrounding a production tubing string including longitudinally spaced apart screens and/or sliding sleeve valves, fluid from various longitudinal portions 20, 22, 24, 26 of the formation 14 will be permitted to migrate longitudinally through the gravel pack in the annular space between the tubing string and the wellbore 12. Of course, a sliding sleeve valve may be closed in an attempt to restrict fluid production from one of the formation portions 20, 22, 24, 26 opposite the valve, but this may have little actual effect, since the fluid may easily migrate longitudinally to another, open, valve in the production tubing string.

[0078] Referring additionally now to FIG. 2, steps of the method 10 have been performed which include positioning a tubing string 28 within the wellbore 12. The

tubing string 28 includes a longitudinally spaced apart series of sealing devices 30, 32, 34 and a longitudinally spaced apart series of flow control devices 36, 38, 40. The tubing string 28 extends to the earth's surface, or to another location remote from the wellbore 12, and its distal end is closed by a bull plug 42.

[0079] The sealing devices 30, 32, 34 are representatively and schematically illustrated in FIG. 2 as inflatable packers, which are capable of radially outwardly extending to sealingly engage the wellbore 12 upon application of fluid pressure to the packers. Of course, other types of packers, such as production packers setttable by pressure, may be utilized for the packers 30, 32, 34, without departing from the principles of the present invention. The packers 30, 32, 34 utilized in the method 10 have been modified somewhat, however, using techniques well within the capabilities of a person of ordinary skill in the art, so that each of the packers is independently inflatable. Thus, as shown in FIG. 2, packers 30 and 32 have been inflated, while packer 34 remains deflated.

[0080] In order to inflate a selected one of the packers 30, 32, 34, a fluid power source is conveyed into the tubing string 28, and fluid is flowed into the packer. For example, in FIG. 2 a coiled tubing string 44 has been inserted into the tubing string 28, the coiled tubing string thereby forming a fluid conduit extending to the earth's surface.

[0081] At its distal end, the coiled tubing string 44 includes a latching device 46 and a fluid coupling 48. The latching device 46 is of conventional design and is used to positively position the fluid coupling 48 within the selected one of the packers 30, 32, 34. For this purpose, each of the packers 30, 32, 34 includes a conventional internal latching profile (not shown in FIG. 2) formed therein.

[0082] The coupling 48 provides fluid communication between the interior of the coiled tubing string 44 and the packer 30, 32, 34 in which it is engaged. Thus, when the coupling 48 is engaged within the packer 30 as shown in FIG. 2, fluid pressure may be applied to the coiled tubing string 44 and communicated to the packer via the coupling 48. Deflation of a previously inflated packer may be accomplished by relieving fluid pressure from within a selected one of the packers 30, 32, 34 via the coupling 48 to the coiled tubing string 44, or to the interior of the tubing string 28 etc. Therefore, it may be clearly seen that each of the packers 30, 32, 34 may be individually and selectively set and unset within the wellbore 12.

[0083] The flow control devices 36, 38, 40 are representatively illustrated as sliding sleeve-type valves. However, it is to be understood that other types of flow control devices may be used for the valves 36, 38, 40, without departing from the principles of the present invention. For example, the valves 36, 38, 40 may instead be downhole chokes, pressure operated valves, remotely controllable valves, etc.

[0084] Each of the valves 36, 38, 40 may be opened and closed independently and selectively to thereby permit or prevent fluid flow between the wellbore 12 external to the tubing string 28 and the interior of the tubing string. For example, the latching device 46 may be engaged with an internal profile of a selected one of the valves 36, 38, 40 to shift its sleeve to its open or closed position in a conventional manner.

[0085] As representatively depicted in FIG. 2, packers 30 and 32 have been inflated and the valve 36 has been closed, thereby preventing fluid migration through the wellbore 12 between the formation portion 22 and the other portions 20, 24, 26 of the formation 14. Note that fluid from the portion 22 may still migrate to the other portions 20, 24, 26 through the formation 14 itself, but such flow through the formation 14 will typically be minimal compared to that which would otherwise be permitted through the wellbore 12. Thus, flow of fluids from the portion 22 to the interior of the tubing string 28 is substantially restricted by the method 10. It will be readily appreciated that production of fluid from selected ones of the other portions 20, 24, 26 may also be substantially restricted by inflating other packers, such as packer 34, and closing other valves, such as valves 38 or 40. Additionally, inflation of the packer 30 may be used to substantially restrict production of fluid from the portion 20, without the need to close a valve.

[0086] If, however, it is desired to produce fluid substantially only from the portion 22, the valve 36 may be opened and the other valves 38, 40 may be closed. Thus, the method 10 permits each of the packers 30, 32, 34 to be selectively set or unset, and permits each of the valves 36, 38, 40 to be selectively opened or closed, which enables an operator to tailor production from the formation 14 as conditions warrant. The use of variable chokes in place of the valves 36, 38, 40 allows even further control over production from each of the portions 20, 22, 24, 26.

[0087] As shown in FIG. 2, three packers 30, 32, 34 and three valves 36, 38, 40 are used in the method 10 to control production from four portions 20, 22, 24, 26 of the formation 14. It will be readily appreciated that any other number of packers and any number of valves (the number of packers not necessarily being the same as the number of valves) may be used to control production from any number of formation portions, as long as a sufficient number of packers is utilized to prevent flow through the wellbore between each adjacent pair of formation portions. Furthermore, production from additional formations intersected by the wellbore could be controlled by extending the tubing string 28 and providing additional sealing devices and flow control devices therein.

[0088] Referring additionally now to FIG. 3, another method 50 is schematically and representatively illustrated. Elements of the method 50 which are similar to those previously described are indicated in FIG. 3 using the same reference numbers, with an added suffix "a".



[0089] The method 50 is in many respects similar to the method 10. However, in the method 50, the power source used to inflate the packers 30a, 32a, 34a is a fluid pump 52 conveyed into the tubing string 28a attached to a wireline or electric line 54 extending to the earth's surface. The electric line 54 supplies electricity to operate the pump 52, as well as conveying the latching device 46a, pump, and coupling 48a within the tubing string 28a. Other conveyances, such as slickline, coiled tubing, etc., may be used in place of the electric line 54, and electricity may be otherwise supplied to the pump 52, without departing from the principles of the present invention. For example, the pump 52 may include a battery, such as the Downhole Power Unit available from Halliburton Energy Services, Inc. of Duncan, Oklahoma.

[0090] As depicted in FIG. 3, the latching device 46a is engaged with the packer 30a, and the coupling 48a is providing fluid communication between the packer and the pump 52. Actuation of the pump 52 causes fluid to be pumped into the packer 30a, thereby inflating the packer, so that it sealingly engages the wellbore 12a. The packer 34a has been previously inflated in a similar manner. Additionally, the valves 36a, 38a have been closed to restrict fluid flow generally radially there-through.

[0091] Note that the packers 30a, 34a longitudinally straddle two of the formation portions 22a, 24a. Thus, it may be seen that fluid flow from multiple formation portions may be restricted in keeping with the principles of the present invention. If desired, another flow control device could be installed in the tubing string 28a above the packer 30a to selectively permit and prevent fluid flow into the tubing string directly from the formation portion 20a while the packer 30a is set within the wellbore 12a.

[0092] Referring additionally now to FIG. 4, another method 60 embodying principles of the present invention is representatively illustrated. Elements shown in FIG. 4 which are similar to those previously described are indicated using the same reference numbers, with an added suffix "b".

[0093] The method 60 is similar in many respects to the method 50, in that the power source used to set selected ones of the packers 30b, 32b, 34b includes the electric line 54b and a fluid pump 62. However, in this case the pump 62 is interconnected as a part of the tubing string 28b. Thus, the pump 62 is not separately conveyed into the tubing string 28b; and is not separately engaged with the selected ones of the packers 30b, 32b, 34b by positioning it therein. Instead, fluid pressure developed by the pump 62 is delivered to selected ones of the packers 30b, 32b, 34b and valves 36b, 38b, 40b via lines 64.

[0094] As used herein, the term "pump" includes any means for pressurizing a fluid. For example, the pump 62 could be a motorized rotary or axial pump, a hydraulic accumulator, a device which utilizes a pressure differential between hydrostatic pressure and atmospheric

pressure to produce hydraulic pressure, other types of fluid pressurizing devices, etc.

[0095] Fluid pressure from the pump 62 is delivered to the lines 64 as directed by a control module 66 interconnected between the pump and lines. Such control modules are well known in the art and may include a plurality of solenoid valves (not shown) for directing the pump fluid pressure to selected ones of the lines 64, in order to actuate corresponding ones of the packers 30b, 32b, 34b and valves 36b, 38b, 40b. For example, if it is desired to inflate the packer 34b, the pump 62 is operated to provide fluid pressure to the control module 66, and the control module directs the fluid pressure to an appropriate one of the lines 64 interconnecting the control module to the packer 34b by opening a corresponding solenoid valve in the control module.

[0096] Electricity to operate the pump 62 is supplied by the electric line 54b extending to the earth's surface. The electric line 54b is properly positioned by engaging the latching device 46b within the pump 62 or control module 66. A wet connect head 68 of the type well known to those of ordinary skill in the art provides an electrical connection between the electric line 54b and the pump 62 and control module 66. Alternatively, the electric line 54b may be a slickline or coiled tubing, and electric power may be supplied by a battery installed as a part of the tubing string or conveyed separately therein. Of course, if the pump 62 is of a type which does not require electricity for its operation, an electric power source is not needed.

[0097] The control module 66 directs the fluid pressure from the pump 62 to selected ones of the lines 64 in response to a signal transmitted thereto via the electric line 54b from a remote location, such as the earth's surface. Thus, the electric line 54b performs several functions in the method 60: conveying the latching device 46b and wet connect head 68 within the tubing string 28b, supplying electric power to operate the pump 62, and transmitting signals to the control module 66. Of course, it is not necessary for the electric line 54b to perform all of these functions, and these functions may be performed by separate elements, without departing from the principles of the present invention.

[0098] Note that the valves 36b, 38b, 40b utilized in the method 60 differ from the valves in the previously described methods 10, 50 in that they are pressure actuated. Pressure actuated valves are well known in the art. They may be of the type that is actuated to a closed or open position upon application of fluid pressure thereto and return to the alternate position upon release of the fluid pressure by a biasing member, such as a spring, they may be of the type that is actuated to a closed or open position only upon application of fluid pressure thereto, or they may be of any other type. Additionally, the valves 36b, 38b, 40b may be chokes in which a resistance to fluid flow generally radially there-through is varied by varying fluid pressure applied thereto, or by balancing fluid pressures applied thereto. Thus,



any type of flow control device may be used for the valves 36b, 38b, 40b, without departing from the principles of the present invention.

[0099] In FIG. 4, the packer 34b has been set within the wellbore 12b, and the valve 40b has been closed. The remainder of the valves 36b, 38b are open. Therefore, fluid flow from the formation portion 26b to the interior of the tubing string 28b is restricted. It may now be clearly seen that it is not necessary to set more than one of the packers 36b, 38b, 40b in order to restrict fluid flow from a formation portion.

[0100] Referring additionally now to FIG. 5, another method 70 embodying principles of the present invention is schematically and representatively illustrated. In FIG. 5, elements which are similar to those previously described are indicated using the same reference numbers, with an added suffix "c".

[0101] The method 70 is substantially similar to the method 60 described above, except that no intervention into the well is used to selectively set or unset the packers 30c, 32c, 34c or to operate the valves 36c, 38c, 40c. Instead, the pump 62c and control module 66c are operated by a receiver 72 interconnected in the tubing string 28c. Power for operation of the receiver 72, pump 62c and control module 66c is supplied by a battery 74 also interconnected in the tubing string 28c. Of course, other types of power sources may be utilized in place of the battery 74. For example, the power source may be an electro-hydraulic generator, wherein fluid flow is utilized to generate electrical power, etc.

[0102] The receiver 72 may be any of a variety of receivers capable of operatively receiving signals transmitted from a remote location. The signals may be in the form of acoustic telemetry, radio waves, mud pulses, electromagnetic waves, or any other form of data transmission.

[0103] The receiver 72 is connected to the pump 62c, so that when an appropriate signal is received by the receiver, the pump is operated to provide fluid pressure to the control module 66c. The receiver 72 is also connected to the control module 66c, so that when another appropriate signal is received by the receiver, the control module is operated to direct the fluid pressure via the lines 64c to a selected one of the packers 30c, 32c, 34c or valves 36c, 38c, 40c. As such, the combined receiver 72, battery 74, pump 62c and control module 66c may be referred to as a common actuator 76 for the sealing devices and flow control devices of the tubing string 28c.

[0104] As shown in FIG. 5, the receiver 72 has received a signal to operate the pump 62c, and has received a signal for the control module 66c to direct the fluid pressure to the packer 30c. The packer 30c has, thus, been inflated and is preventing fluid flow longitudinally through the wellbore 12c between the formation portions 20c and 22c.

[0105] Referring additionally now to FIG. 6, another method 80 embodying principles of the present invention is schematically and representatively illustrated. El-

ements of the method 80 which are similar to those previously described are indicated in FIG. 6 with the same reference numbers, with an added suffix "d".

[0106] The method 80 is similar to the previously described method 70. However, instead of a common actuator 76 utilized for selectively actuating the sealing devices and flow control devices, the method 80 utilizes a separate actuator 82, 84, 86 directly connected to a corresponding pair of the packers 30d, 32d, 34d and valves 36d, 38d, 40d. In other words, each of the actuators 82, 84, 86 is interconnected to one of the packers 30d, 32d, 34d, and to one of the valves 36d, 38d, 40d.

[0107] Each of the actuators 82, 84, 86 is a combination of a receiver 72d, battery 74d, pump 62d and control module 66d. Since each actuator 82, 84, 86 is directly connected to its corresponding pair of the packers 30d, 32d, 34d and valves 36d, 38d, 40d, no lines (such as lines 64c, see FIG. 6) are used to interconnect the control modules 66d to their respective packers and valves. However, lines could be provided if it were desired to space one or more of the actuators 82, 84, 86 apart from its corresponding pair of the packers and valves. Additionally, it is not necessary for each actuator 82, 84, 86 to be connected to a pair of the packers and valves; for example, a separate actuator could be utilized for each packer and for each valve, or for any combination thereof, in keeping with the principles of the present invention.

[0108] In FIG. 6, the receiver 72d of the actuator 84 has received a signal to operate its pump 62d, and a signal for its control module 66d to direct the fluid pressure developed by the pump to the packer 32d, and then to direct the fluid pressure to the valve 38d. The packer 32d is, thus, sealingly engaging the wellbore 12d between the formation portions 22d and 24d. Additionally, the receiver 72d of the actuator 86 has received a signal to operate its pump 62d, and a signal for its control module 66d to direct the fluid pressure to the packer 34d. Therefore, the packer 34d is sealingly engaging the wellbore 12d between the formation portions 24d and 26d, and fluid flow is substantially restricted from the formation portion 24d to the interior of the tubing string 28d.

[0109] Referring additionally now to FIG. 7, another method 90 embodying principles of the present invention is schematically and representatively illustrated. Elements shown in FIG. 7 which are similar to those previously described are indicated using the same reference numbers, with an added suffix "e".

[0110] The method 90 is similar to the method 70 shown in FIG. 5, in that a single actuator 92 is utilized to selectively actuate the packers 30e, 32e, 34e and valves 36e, 38e, 40e. However, the actuator 92 relies only indirectly on a battery 94 for operation of its fluid pump 96, thus greatly extending the useful life of the battery. A receiver 98 and control module 100 of the actuator 92 are connected to the battery 94 for operation thereof.

[0111] The pump 96 is connected via a shaft 102 to

[0131] A fluid, such as oil, is contained in the chamber 208. The valve/choke 196 regulates venting of the fluid from the chamber 208 to the exterior of the actuator 190. When the valve/choke 196 is opened, the fluid in the chamber 208 is permitted to escape therefrom, thereby permitting the housing 192 to displace relative to the mandrel 194. A larger or smaller orifice may be selected to correspondingly increase or decrease the rate at which the housing 192 displaces relative to the mandrel 194 when the fluid is vented from the chamber 208, or the electrical signal on the lines 198 may be adjusted to correspondingly vary the rate of fluid flow through the valve/choke 196 if it includes a variable choke.

[0132] Referring additionally now to FIG. 14, another actuator 214 embodying principles of the present invention is representatively illustrated. The actuator 214 is similar in many respects to the actuator 172 described above. However, the actuator 214 utilizes an increased piston area associated with its annular gas chamber 216 in order to increase the force output by the actuator.

[0133] The actuator 214 includes the chamber 216 and annular chambers 218, 220 formed between an outer generally tubular housing 222 and an inner generally tubular mandrel 224. Circumferential seals 226 sealingly engage the mandrel 224 and the housing 222. The chamber 216 contains gas, such as air or nitrogen, at atmospheric or another relatively low pressure, the chamber 218 is exposed to hydrostatic pressure via an opening 228 formed through the housing 222, and the chamber 220 contains a fluid, such as oil.

[0134] A valve 230 selectively permits venting of the fluid in the chamber 220 to the exterior of the actuator 214. The housing 222 is prevented by the fluid in the chamber 220 from displacing relative to the mandrel 224. When the valve 230 is opened, for example, by applying an appropriate electrical signal to lines 231, the fluid in the chamber 220 is vented, thereby permitting the housing 222 to displace relative to the mandrel 224.

[0135] Note that each of the actuators 126, 172, 190, 214 has been described above as if the housing and/or mandrel thereof is connected to the packer, valve, choke, tool, item of equipment, flow control device, etc. which is desired to be actuated. However, it is to be clearly understood that each of the actuators 126, 172, 190, 214 may be otherwise connected or attached to the tool(s) or item(s) of equipment, without departing from the principles of the present invention. For example, the output of each of valves 168, 186, 196, 230 may be connected to any hydraulically actuated tool(s) or item(s) of equipment for actuation thereof. In this manner, each of the actuators 126, 172, 190, 214 may serve as the actuator or fluid power source in the methods 50, 60, 70, 80, 120.

[0136] Referring additionally now to FIG. 15, a container 232 embodying principles of the present invention is representatively illustrated. The container 232 may be utilized to store a gas at atmospheric or another relatively low pressure downhole. In an embodiment de-

scribed below, the container 232 is utilized in the actuation of one or more tools or items of equipment downhole.

[0137] The container 232 includes a generally tubular inner housing 234 and a generally tubular outer housing 236. An annular chamber 238 is formed between the inner and outer housings 234, 236. In use, the annular chamber 238 contains a gas, such as air or nitrogen, at atmospheric or another relatively low pressure.

[0138] It will be readily appreciated by one skilled in the art that, in a well, hydrostatic pressure will tend to collapse the outer housing 236 and burst the inner housing 234, due to the differential between the pressure in the annular chamber 238 and the pressure external to the container 232 (within the inner housing 234 and outside the outer housing 236). For this reason, the container 232 includes a series of circumferentially spaced apart and longitudinally extending ribs or rods 240. Preferably, the ribs 240 are spaced equidistant from each other, but that is not necessary, as shown in FIG. 15.

[0139] The ribs 240 significantly increase the ability of the outer housing 236 to resist collapse due to pressure applied externally thereto. The ribs 240 contact both the outer housing 236 and the inner housing 234, so that radially inwardly directed displacement of the outer housing 236 is resisted by the inner housing 234. Thus, the container 232 is well suited for use in high pressure downhole environments.

[0140] Referring additionally now to FIG. 16, an apparatus 242 embodying principles of the present invention is representatively illustrated. The apparatus 242 demonstrates use of the container 232 along with a fluid power source 244, such as any of the pumps and/or actuators described above which are capable of producing an elevated fluid pressure, to control actuation of a tool 246.

[0141] The tool 246 is representatively illustrated as including a generally tubular outer housing 248 sealingly engaged and reciprocally disposed relative to a generally tubular inner mandrel 250. Annular chambers 252, 254 are formed between the housing 248 and mandrel 250. Fluid pressure in the chamber 252 greater than fluid pressure in the chamber 254 will displace the housing 248 to the left relative to the mandrel 250 as viewed in FIG. 16, and fluid pressure in the chamber 254 greater than fluid pressure in the chamber 252 will displace the housing 248 to the right relative to the mandrel 250 as viewed in FIG. 16. Of course, either or both of the housing 248 and mandrel 250 may displace in actual practice. It is to be clearly understood that the tool 246 is merely representative of tools, such as packers, valves, chokes, etc., which may be operated by fluid pressure applied thereto.

[0142] When it is desired to displace the housing 248 and/or mandrel 250, one of the chambers 252, 254 is vented to the container 232, and the other chamber is opened to the fluid power source 244. For example, to displace the housing 248 to the right relative to the man-

mandrel 250 as viewed in FIG. 16, a valve 256 between the fluid power source 244 and the chamber 254 is opened, and a valve 258 between the container 232 and the chamber 252 is opened. The resulting pressure differential between the chambers 252, 254 causes the housing 248 to displace to the right relative to the mandrel 250. To displace the housing 248 to the left relative to the mandrel 250 as viewed in FIG. 16, a valve 260 between the fluid power source 244 and the chamber 252 is opened, and a valve 262 between the container 232 and the chamber 254 is opened. The valves 260, 262 are closed when the housing 248 is displaced to the right relative to the mandrel, and the valves 256, 258 are closed when the housing is displaced to the left relative to the mandrel. The tool 246 may, thus, be repeatedly actuated by alternately connecting each of the chambers 252, 254 to the fluid power source 244 and the container 232.

[0143] The valves 256, 258, 260, 262 are representatively illustrated in FIG. 16 as being separate electrically actuated valves, but it is to be understood that any type of valves may be utilized without departing from the principles of the present invention. For example, the valves 256, 258, 260, 262 may be replaced by two appropriately configured conventional two-way valves, etc.

[0144] The tool 246 may be used to actuate another tool, without departing from the principles of the present invention. For example, the mandrel 250 may be attached to a packer mandrel, so that when the mandrel 250 is displaced in one direction relative to the housing 248, the packer is set; and when the mandrel 250 is displaced in the other direction relative to the housing 248, the packer is unset. For this purpose, the housing 248 or mandrel 250 may be interconnected in a tubular string for conveyance within a well.

[0145] Note that the fluid power source 244 may alternatively be another source of fluid at a pressure greater than that of the gas or other fluid in the container 232, without the pressure of the delivered fluid being elevated substantially above hydrostatic pressure in the well. For example, element 244 shown in FIG. 16 may be a source of fluid at hydrostatic pressure. The fluid source 244 may be the well annulus surrounding the apparatus 242 when it is disposed in the well; it may be the interior of a tubular string to which the apparatus is attached; it may originate in a chamber conveyed into the well with, or separate from, the apparatus; if conveyed into the well in a chamber, the chamber may be a collapsible or elastic bag, or the chamber may include an equalizing piston separating clean fluid for delivery to the tool 246 from fluid in the well; the fluid source may include fluid processing features, such as a fluid filter, etc. Thus, it will be readily appreciated that it is not necessary for the fluid source 244 to deliver fluid to the tool 246 at a pressure having any particular relationship to hydrostatic pressure in the well, although the fluid source may deliver fluid at greater than, less than and/or equal to hy-

drostatic pressure.

[0146] Referring additionally to FIG. 17, another apparatus 264 utilizing the container 232 and embodying principles of the present invention is representatively illustrated. The apparatus 264 includes multiple tools 266, 268, 270 having generally tubular outer housings 272, 274, 276 sealingly engaged with generally tubular inner mandrels 278, 280, 282, thereby forming annular chambers 284, 286, 288 therebetween, respectively. The tools 266, 268, 270 are merely representative of the wide variety of packers, valves, chokes, and other flow control devices, items of equipment and tools which may be actuated using the apparatus 264. Alternatively, displacement of each of the housings 272, 274, 276 relative to corresponding ones of the mandrels 278, 280, 282 may be utilized to actuate associated flow control devices, items of equipment and tools attached thereto. For example, the apparatus 264 including the container 232 and the tool 266 may be interconnected in a tubular string, with the tool 266 attached to a packer mandrel, such that when the housing 272 is displaced relative to the mandrel 278, the packer is set.

[0147] Valves 290, 292, 294 initially isolate each of the chambers 284, 286, 288, respectively, from communication with the chamber 238 of the container 232. Each of the chambers 284, 286, 288 is initially substantially filled with a fluid, such as oil. Thus, as the apparatus 264 is lowered within a well, hydrostatic pressure in the well acts to pressurize the fluid in the chambers 284, 286, 288. However, the fluid prevents each of the housings 272, 274, 276 from displacing substantially relative to its corresponding mandrel 278, 280, 282.

[0148] To actuate one of the tools 266, 268, 270, its associated valve 290, 292, 294 is opened, thereby permitting the fluid in the corresponding chamber 284, 286, 288 to flow into the chamber 238 of the container 232. As described above, the chamber 238 is substantially filled with a gas, such as air or nitrogen at atmospheric or another relatively low pressure. Hydrostatic pressure in the well will displace the corresponding housing 272, 274, 276 relative to the corresponding mandrel 278, 280, 282, forcing the fluid in the corresponding chamber 284, 286, 288 to flow through the corresponding valve 290, 292, 294 and into the container 232. Such displacement may be readily stopped by closing the corresponding valve 290, 292, 294.

[0149] Operation of the valves 290, 292, 294 may be controlled by any of the methods described above. For example, the valves 290, 292, 294 may be connected to an electrical power source conveyed into the well on slickline, wireline or coiled tubing; a receiver may be utilized to receive a remotely transmitted signal whereupon the valves are connected to an electrical power source, such as a battery, downhole, etc. However, it is to be clearly understood that other methods of operating the valves 290, 292, 294 may be utilized without departing from the principles of the present invention.

[0150] The valve 290 may be a solenoid valve. The

valve 292 may be a fusible plug-type valve (a valve openable by dissipation of a plug blocking fluid flow through a passage therein), such as that available from BEI. The valve 294 may be a valve/choke, such as the valve/choke 196 described above. Thus, it may be clearly seen that any type of valve may be used for each of the valves 290, 292, 294.

[0151] Referring additionally now to FIG. 18, another apparatus 296 embodying principles of the present invention is representatively illustrated. The apparatus 296 includes the receiver 72, battery 74 and pump 62 described above, combined in an individual actuator or hydraulic power source 298 connected via a line 300 to a tool or item of equipment 302, such as a packer, valve, choke, or other flow control device. The line 300 may be internally or externally provided, and the actuator 298 may be constructed with the tool 302, with no separation therebetween.

[0152] In FIG. 18, the apparatus 296 is depicted interconnected as a part of a tubular string 304 installed in a well. To operate the tool 302, a signal is transmitted from a remote location, such as the earth's surface or another location within the well, to the receiver 72. In response, the pump 62 is supplied electrical power from the battery 74, so that fluid at an elevated pressure is transmitted via the line 300 to the tool 302, for example, to set or unset a hydraulic packer, open or close a valve, vary a choke flow restriction, etc. Note that the representatively illustrated tool 302 is of the type which is responsive to fluid pressure applied thereto.

[0153] Referring additionally now to FIG. 19, an apparatus 306 embodying principles of the present invention is representatively illustrated. The apparatus 306 is similar in many respects to the apparatus 296 described above, however, a tool 308 of the apparatus 306 is of the type responsive to force applied thereto, such as a packer set by applying an axial force to a mandrel thereof, or a valve opened or closed by displacing a sleeve or other blocking member therein.

[0154] To operate the tool 308, a signal is transmitted from a remote location, such as the earth's surface or another location within the well, to the receiver 72. In response, the pump 62 is supplied electrical power from the battery 74, so that fluid at an elevated pressure is transmitted via the line 300 to a hydraulic cylinder 310 interconnected between the tool 308 and the actuator 298. The cylinder 310 includes a piston 312 therein which displaces in response to fluid pressure in the line 300. Such displacement of the piston 312 operates the tool 308, for example, displacing a mandrel of a packer, opening or closing a valve, varying a choke flow restriction, etc.

[0155] Thus have been described the methods 10, 50, 60, 70, 80, 90, 120, and apparatus and actuators 126, 172, 190, 214, 242, 264, 296, 306, which permit convenient and efficient control of fluid flow within a well, and operation of tools and items of equipment within the well. Of course, many modifications, additions, substi-

tutions, deletions, and other changes may be made to the methods described above and their associated apparatus, which changes would be obvious to one of ordinary skill in the art, and these are contemplated by the principles of the present invention. For example, any of the methods may be utilized to control fluid injection, rather than production, within a well, each of the valves 168, 186, 196, 230, 256, 258, 260, 262, 290, 292, 294 may be other than a solenoid valve, such as a pilot-operated valve, and any of the actuators, pumps, control modules, receivers, packers, valves, etc. may be differently configured or interconnected, without departing from the principles of the present invention.

## Claims

1. A method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within a portion of the wellbore intersecting a formation, the tubular string including a longitudinally spaced apart series of wellbore sealing devices; and actuating a selected at least one of the sealing devices to thereby selectively restrict fluid flow through the wellbore between first and second portions of the formation.
2. A method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore opposite a formation intersected by the wellbore, so that each of the sealing devices is positioned between adjacent ones of a corresponding series of portions of the formation, the tubular string including a longitudinally spaced apart series of sealing devices; conveying a power source into the tubular string, the power source being configured to actuate selected ones of the sealing devices; and actuating at least one of the sealing devices to thereby prevent fluid flow longitudinally through the wellbore external to the tubular string.
3. A method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices; conveying a pump into the tubular string; engaging the pump with a selected at least one of the sealing devices; and actuating the pump, thereby sealingly engaging the at least one of the sealing devices with the wellbore.
4. A method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices and a pump; conveying a power source into the tubular string, en-

gaging the power source with the pump; and actuating the pump to thereby sealingly engage a selected at least one of the sealing devices with the wellbore.

5. A method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices, a pump, a control module interconnecting the pump to the sealing devices, and a receiver connected to the pump and control module; transmitting a first signal to the receiver, thereby directing the control module to provide fluid communication between the pump and a selected at least one of the sealing devices; transmitting a second signal to the receiver, thereby actuating the pump; and sealingly engaging the at least one of the sealing devices with the wellbore.
6. A method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning a tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices and a longitudinally spaced apart series of actuators, each of the actuators being operative to actuate one of the sealing devices; and transmitting a first signal to a selected at least one of the actuators, thereby actuating a corresponding selected at least one of the sealing devices to sealingly engage the wellbore.
7. A method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning the tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices and an actuator in selectable fluid communication with each sealing device; selecting at least one of the sealing devices for actuation; and transmitting a first signal to the actuator, thereby actuating the selected at least one of the sealing devices to sealingly engage the wellbore.
8. A method of controlling fluid flow within a subterranean wellbore, the method comprising the steps of: positioning the tubular string within the wellbore, the tubular string including a longitudinally spaced apart series of sealing devices and a first longitudinally spaced apart series of control modules, each of the first control modules being connected to one of the sealing devices; interconnecting lines between each of the first control modules; extending the lines to a location remote from the control modules; and transmitting a first signal to a selected at least one of the first control modules, thereby actuating a corresponding selected at least one of the sealing devices to sealingly engage the wellbore.

9. Apparatus for controlling fluid flow within a subterranean wellbore, the apparatus comprising: a plurality of wellbore sealing devices interconnected in a tubular string and a power source configured for actuating selected ones of the sealing devices to sealingly engage the wellbore.

10. Apparatus for controlling fluid flow within a subterranean well, the apparatus comprising: a series of longitudinally spaced apart sealing devices; a series of longitudinally spaced apart flow control devices the flow control devices and sealing devices being interconnected in a tubular string in which the flow control devices are alternated with the sealing devices and a power source adapted for actuating the sealing devices and flow control devices.

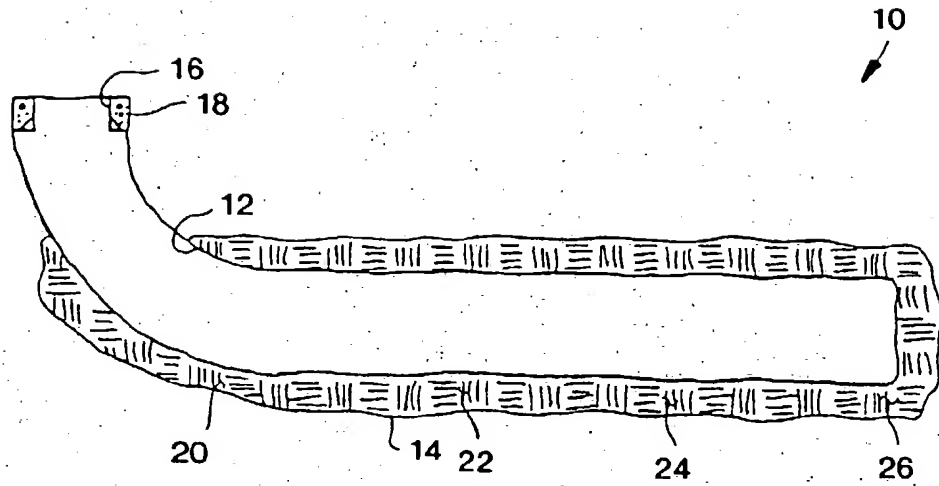


FIG. 1

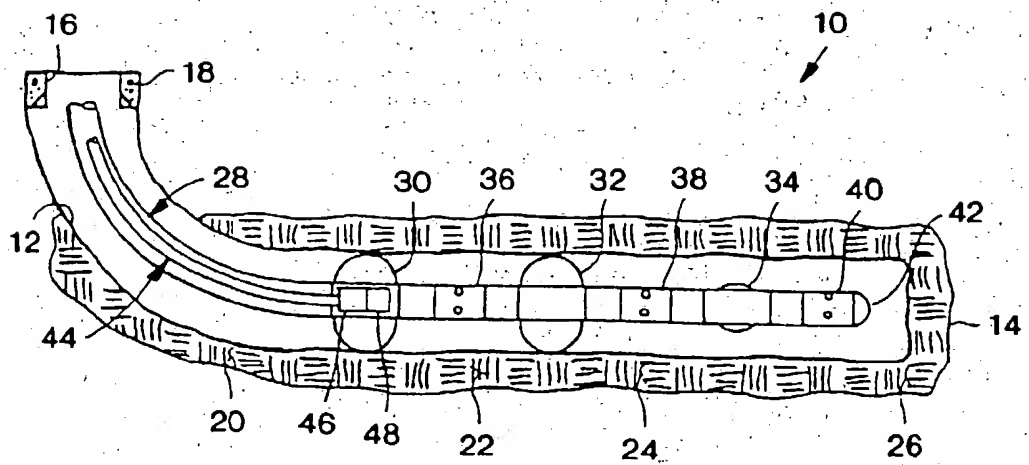


FIG. 2

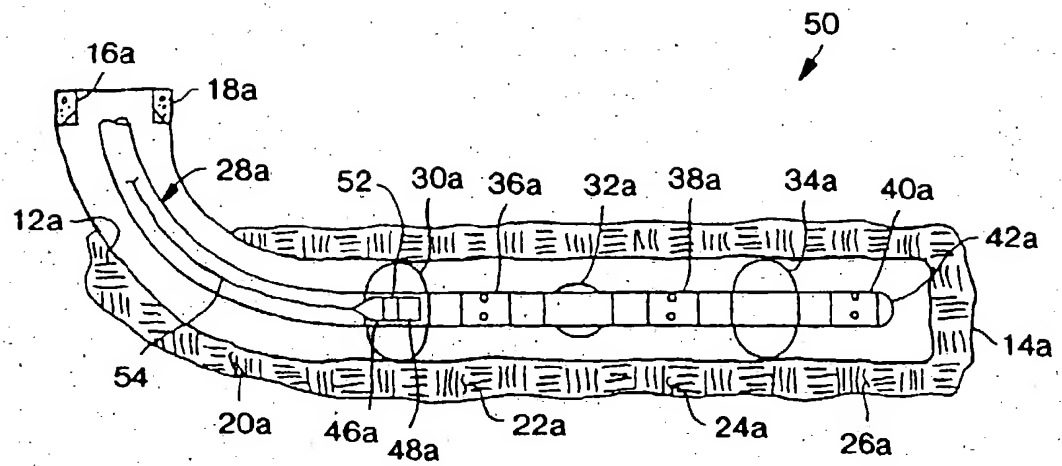


FIG. 3

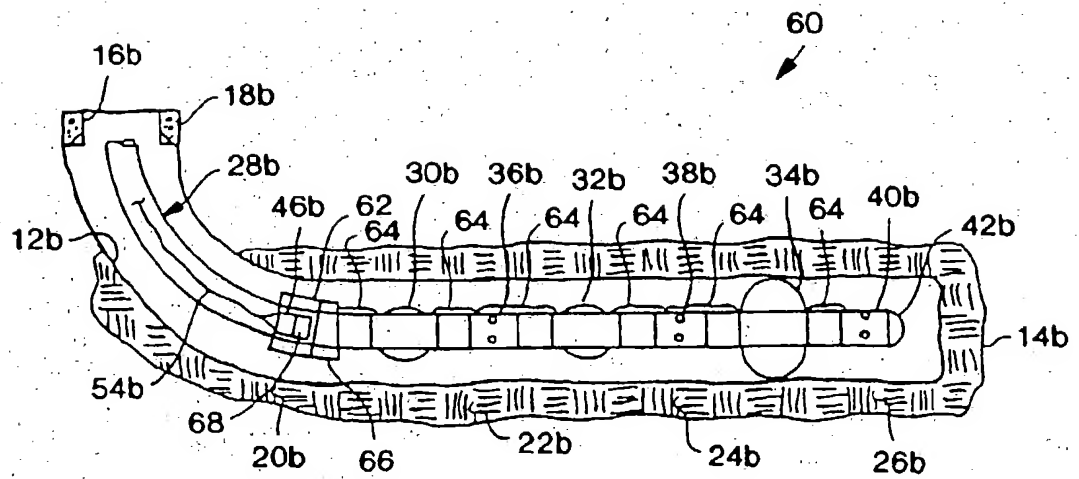


FIG. 4



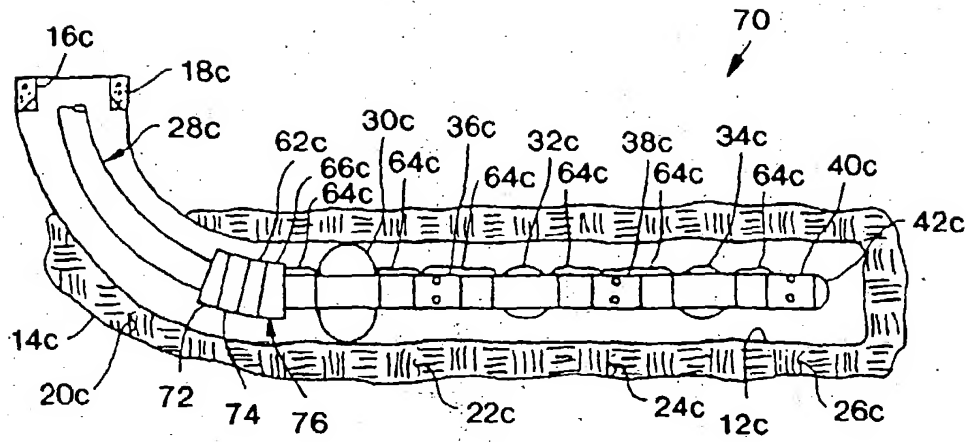


FIG. 5

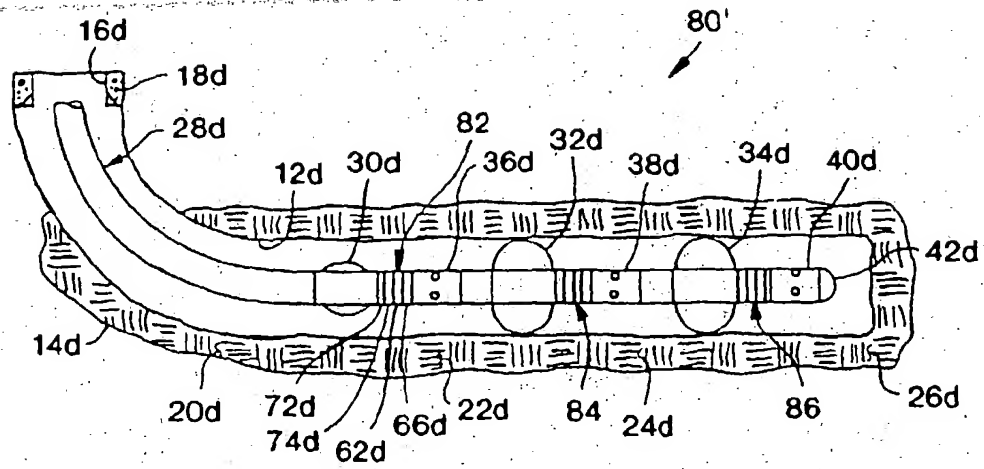


FIG. 6

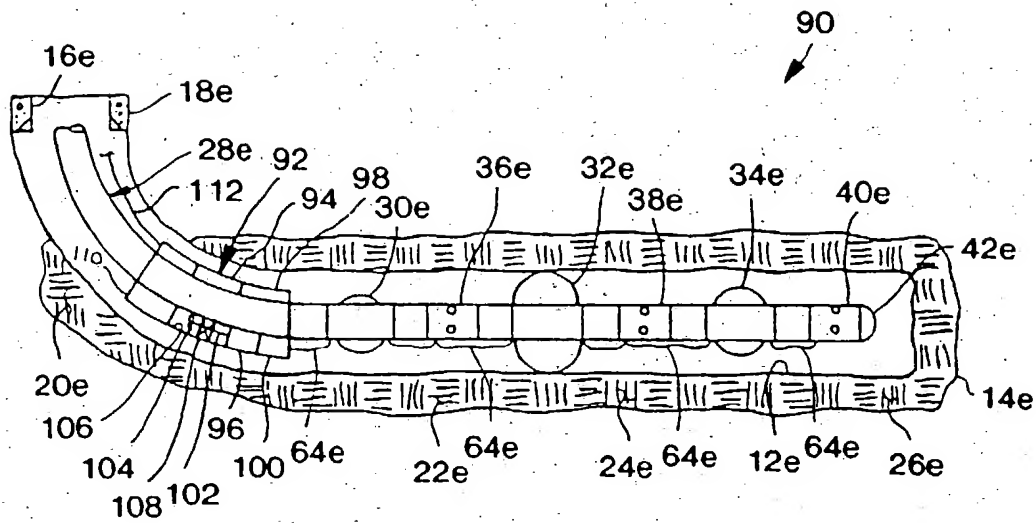


FIG. 7

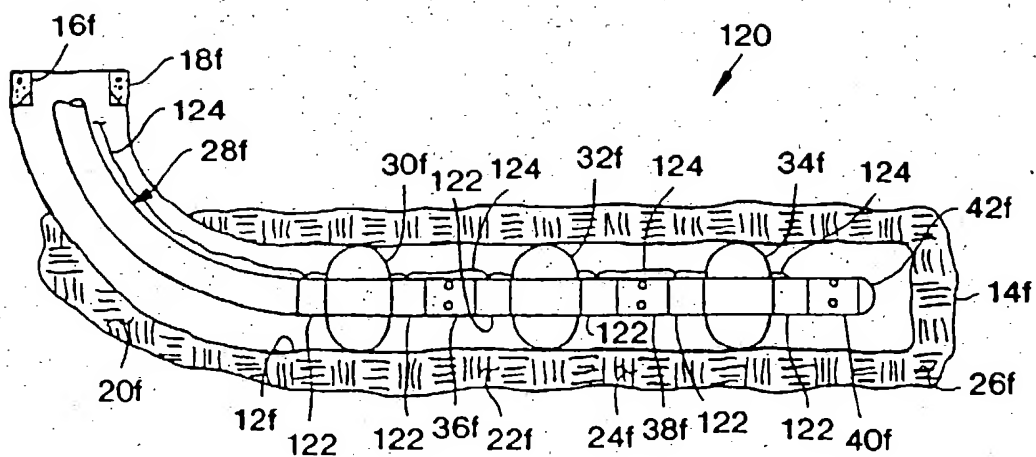


FIG. 8



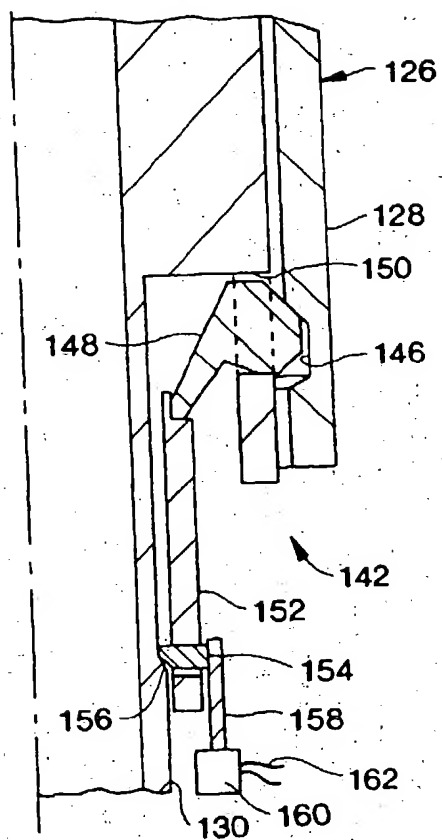


FIG. 10

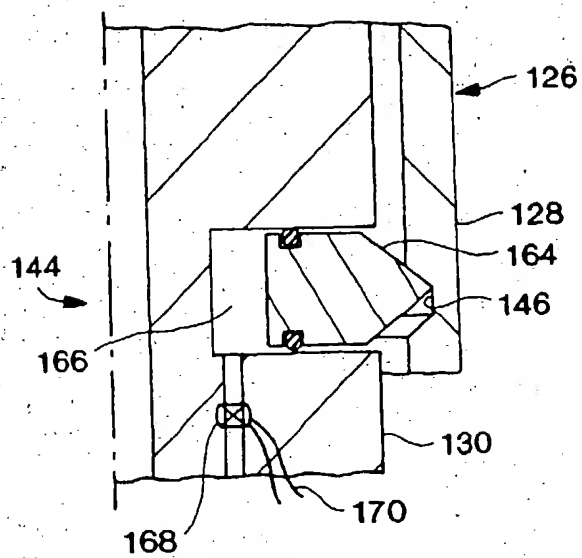


FIG. 11

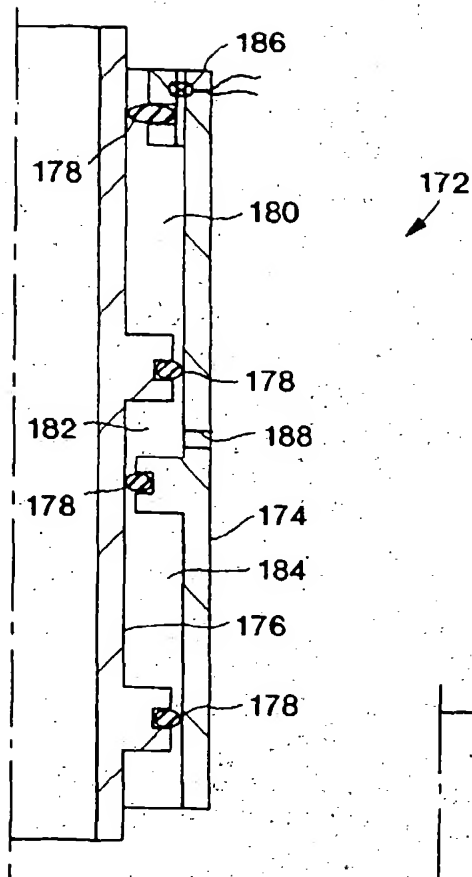


FIG. 12

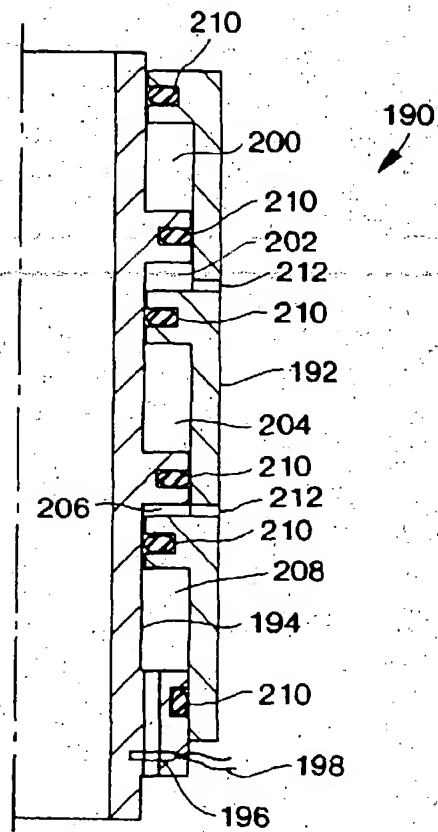


FIG. 13

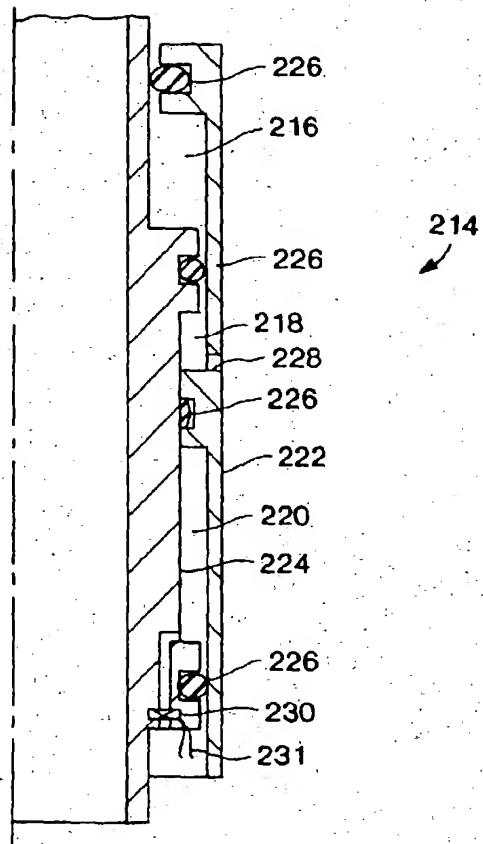


FIG. 14

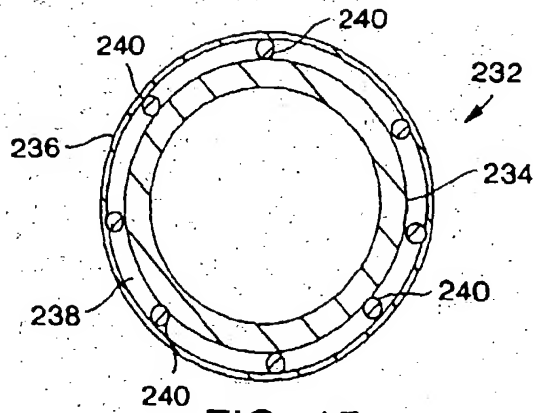


FIG. 15

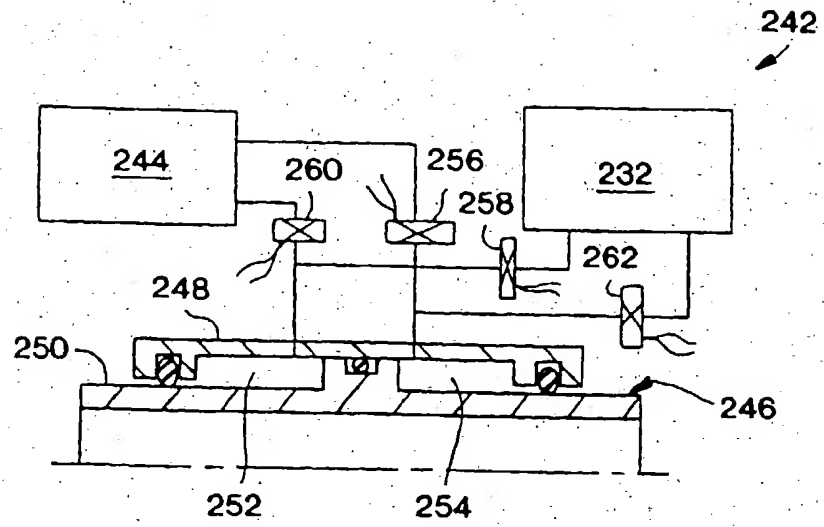


FIG. 16

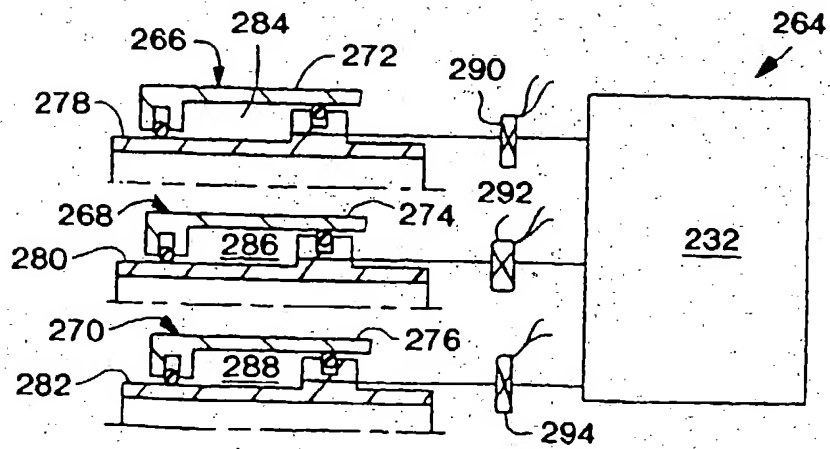


FIG. 17



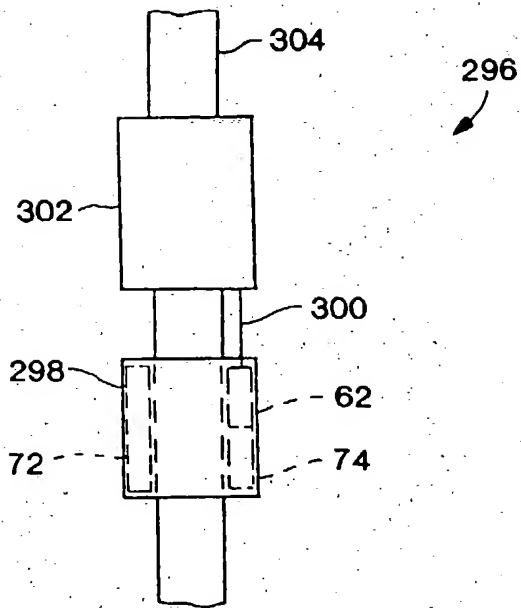


FIG. 18


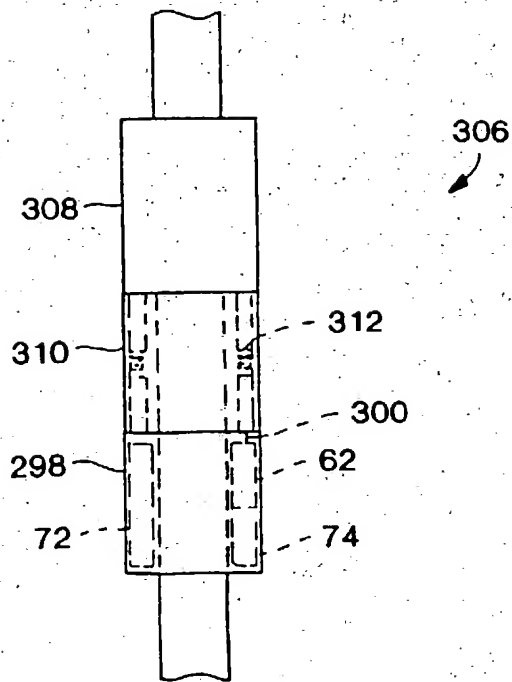


FIG. 19





Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 999 341 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
15.05.2002 Bulletin 2002/20

(51) Int Cl.7: E21B 33/124, E21B 43/14

(43) Date of publication A2:  
10.05.2000 Bulletin 2000/19

(21) Application number: 99308552.1

(22) Date of filing: 28.10.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Kilgore, Marion D.  
Dallas, Texas 75287 (US)

(74) Representative: Wain, Christopher Paul et al  
A.A. Thornton & Co.  
235 High Holborn  
London WC1V 7LE (GB)

(30) Priority: 02.11.1998 US 184770

(71) Applicant: Halliburton Energy Services, Inc.  
Dallas, Texas 75381-9052 (US)

### (54) Method and apparatus for controlling fluid flow in subterranean formations

(57) Apparatus and methods for controlling fluid flow within a subterranean well. A longitudinally spaced apart series of selectively set and unset inflatable packers (30,32,34) is utilized to substantially isolate desired portions (20,22,24,26) of a formation (14) intersected by a

well (12). Setting and unsetting of the packers (30,32,34) may be accomplished by a variety of devices, some of which may be remotely controllable. Additionally, a series of fluid control devices (36,38,40) may be alternated with the packers (30,32,34) as part of a tubular string (28) positioned within the well (12).

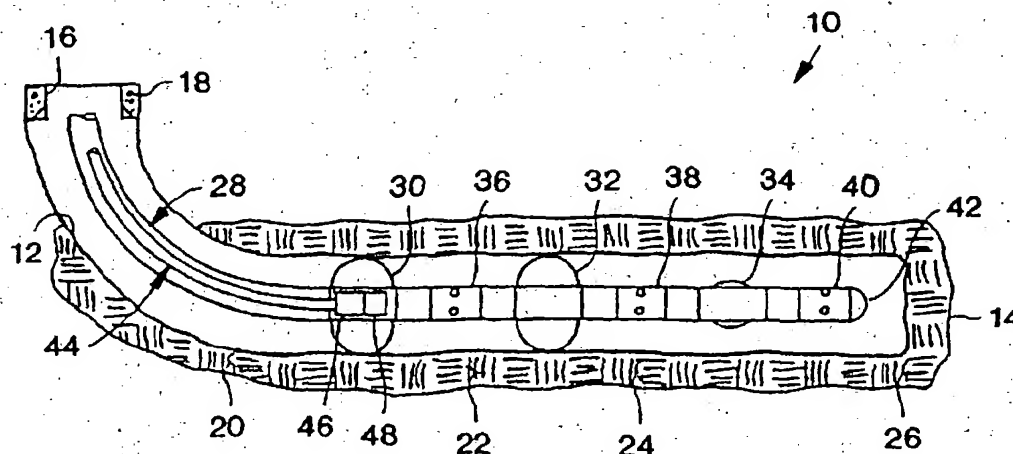


FIG. 2

EP 0 999 341 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 8552

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 803 167 A (WEIGHTMAN BRUCE ET AL) 8 September 1998 (1998-09-08)	1,2,4-10	E21B33/124 E21B43/14
Y	* column 4, line 58 - column 5, line 5 * * column 5, line 29 - line 37 * * column 9, line 51 - line 53 * * column 15, line 53 - line 65 *	3	
X	US 5 547 029 A (RUBBO RICHARD P ET AL) 20 August 1996 (1996-08-20)	1,9,10	
A	* column 2, line 34 - line 44 * * column 6, line 47 - line 56 * * column 3, line 62 - line 65; figure 1 *	2,3	
X	US 5 692 564 A (BROOKS ROBERT T) 2 December 1997 (1997-12-02)	1,9,10	
	* column 10, line 26 - line 63 *		
X	EP 0 697 500 A (HALLIBURTON CO) 21 February 1996 (1996-02-21)	1,5-10	
	* column 12, line 54 - column 13, line 10; figures 7, 8A *		
Y	US 2 839 142 A (HUBER THEODORE A) 17 June 1958 (1958-06-17)	3	E21B
A	* column 4, line 70 - column 5, line 20; figures 1,3 *	2,4	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 15 March 2002	Examiner Bellingacci, F
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EPO FORM 1503 to 62 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 8552

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-03-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5803167	A	08-09-1998	US 5706892 A	13-01-1998
			US 5934371 A	10-08-1999
			US 5937945 A	17-08-1999
			US 5887657 A	30-03-1999
			US 5868201 A	09-02-1999
			AU 4114899 A	16-09-1999
			AU 4114999 A	16-09-1999
			AU 4115099 A	16-09-1999
			AU 4115299 A	16-09-1999
			AU 710376 B2	16-09-1999
			AU 5024196 A	27-08-1996
			CA 2187434 A1	15-08-1996
			GB 2302349 A ,B	15-01-1997
			GB 2333790 A ,B	04-08-1999
			GB 2333791 A ,B	04-08-1999
			GB 2334281 A ,B	18-08-1999
			GB 2333792 A ,B	04-08-1999
			GB 2334282 A ,B	18-08-1999
			GB 2335453 A ,B	22-09-1999
			NO 960526 A	12-08-1996
			WO 9624745 A2	15-08-1996
US 5547029	A	20-08-1996	AU 3727495 A	19-04-1996
			WO 9610123 A1	04-04-1996
US 5692564	A	02-12-1997	AU 719793 B2	18-05-2000
			AU 7034396 A	15-05-1997
			CA 2188343 A1	07-05-1997
			GB 2306986 A ,B	14-05-1997
			NO 964682 A	07-05-1997
EP 0697500	A	21-02-1996	US 5555945 A	17-09-1996
			CA 2155917 A1	16-02-1996
			EP 0697500 A2	21-02-1996
US 2839142	A	17-06-1958	US 2831540 A	22-04-1958

EPC FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

